




NUP BEARING LTD

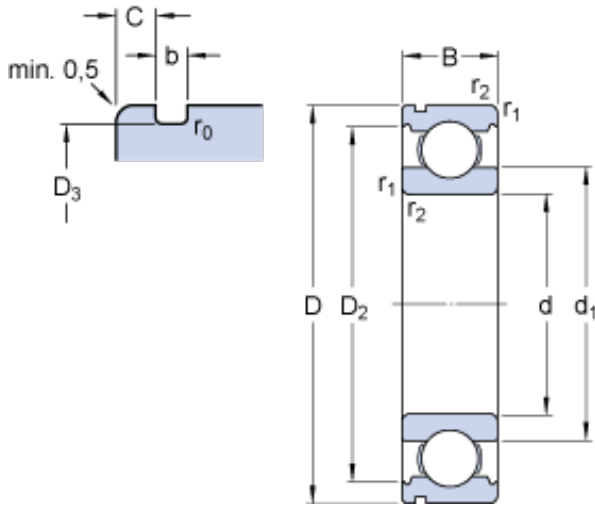

20 mm x 47 mm x 14 mm skf 6204 N Deep groove ball bearings

Bearing No. 6204 N

6204 N Bearing 2D drawings and 3D CAD models

Size	47x20x14 mm
Bore Diameter	47 mm
Outer Diameter	20 mm
Width	14 mm
d	20 mm
D	47 mm
B	14 mm
d ₁	28.8 mm
D ₂	40.59 mm
D ₃	44.6 mm
b	1.35 mm
C	2.46 mm
r ₀	0.4 mm
d _a - min.	25.6 mm
D _a - max.	41.4 mm
D _b - min.	54 mm
b _a - min.	1.5 mm
C _a - max.	3.58 mm
r _a - max.	1 mm
Basic dynamic load rating - C	13.5 kN
Basic static load rating - C ₀	6.6 kN
Fatigue load limit - P _u	0.28 kN
Reference speed	32000 r/min
Limiting speed	20000 r/min



NUP BEARING LTD

Calculation factor - k_r	0.025
Calculation factor - f_0	13
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	Yes
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	20MM Bore; 47MM Outside Diameter; 14MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Other Features	Deep Groove With Snap Ring Groove
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.skf.com



NUP BEARING LTD

Weight / LBS	0.234
Bore	0.787 Inch 20 Millimeter
Outside Diameter	1.85 Inch 47 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.551 Inch 14 Millimeter
d_1	28.8 mm
D_2	40.59 mm
D_3	44.6 mm
r_0 max.	0.4 mm
d_a min.	25.6 mm
D_a max.	41.4 mm
D_b min.	54 mm
b_a min.	1.5 mm
C_a max.	3.58 mm
r_a max.	1 mm
Basic dynamic load rating C	13.5 kN
Basic static load rating C_0	6.55 kN
Fatigue load limit P_u	0.28 kN
Calculation factor k_r	0.025
Calculation factor f_0	13
Mass bearing	0.11 kg